

Model: P3250UC Maintenance-Free



Enjoy great tasting Fresh water from our range of point-of-use under-counter water filtration products. Better water better hydrates your body for a great day of effectiveness and fun. Ideal for households or office pantries for drinking and food preparation.



[www.WaterFilter.com.sg](http://www.WaterFilter.com.sg)


Quantum Impact Pte Ltd  
Email: [Enquiry@waterfilter.com.sg](mailto:Enquiry@waterfilter.com.sg)  
Tel: (65) 6405 5721 / 9001 6441  
Fax: 6835 9813

*Better water,  
Better Life!*

Disclaimer: Whilst every effort is made to ensure accurate & updated information, Quantum Impact Pte Ltd disclaims all and any liability to any persons or organization with respect to any errors or omissions which may be made in this publication.



1-Stage Twist-Locks Drinking Water Filtration System Model: PW2000F

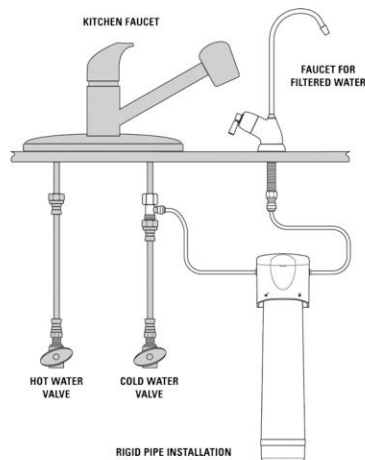

3-Stage Twist-Locks Drinking Water Filtration System Model: PW1250F



2-Stage Twist-Locks Drinking Water Filtration System Model: PW750F



Trusted products for 20 years

Clutter free counter top  
comes with auxiliary faucet drilled on counter

Green & Economical  
no electricity required

Great tasting quality water

Reduces & removes Chlorine & harmful Trihalomethanes

Hassle-free  
no cleaning required for filters

Easy change of cartridge  
patented auto-shut twist-locks allow dry replacement of cartridges without switching off mains. no tools required. easy DIY in minutes



	P5250UC	PW2000F	PW750F	PW1250F
	5-Stage Maintenance Free	1 Stage Twist Locks	2 Stage Twist Locks	3 Stage Twist Locks
	Reduces Sediment, rust, silt, Chlorine taste and odor, Chloramines & Trihalomethanes (THMs), Microbiological cysts, Altrazine & Lindane			
Lead	Y	N	Y	Y
Bacterial & viruses, etc.	inhibits growth	inhibits growth	inhibits growth	removes < 99% of bacteria & virus
Filter Life	3-5 years	12- 24 mos	AC750 - 6 mos, AC200 - 6 to 12 mos	AC750 - 6 to 12 mos, UF - 12 to 24 mos
Cartridge Replacement	N	AC2000F	AC750 & AC200	AC750, AC750 & Hollow Fiber (Ultrafiltration)
Flow Rate L/min	"7.57L/min (60-80psi water pressure)"	"1.89L/min (30-100psi)"	"3.78/min (30-100psi)"	"3.78L/min (30-100psi)"
Working Temperature (DC)	1 to 38	5 to 38	5 to 38	5 to 38
Capacity	20,000G / 75,700L	2,000G / 7,570L	750G / 2,839L	1,250G / 4,731L
Dimensions (cm)	10(D)x45(H)	6.4(D) x 29.9(H)	18.5(L) x 9.4(W) x 32.5(H)	30.5(L) x 10.7(W) x 32.5(H)
ANSI/NSF	42	42	42, 53	42, 53